



RZW Series

Features


- 105°C, 4,000 ~ 10,000 hours assured
- Low ESR, suitable for switching power supplies
- Smaller size with large permissible ripple current
- RoHs compliant



Specifications

Items	Performance																														
Category Temperature Range	-55℃ ~ +105℃																														
Capacitance Tolerance	± 20% (at 120 Hz, 20℃)																														
Leakage Current (at 20℃)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																														
Tanδ (at 120 Hz, 20℃)	<table><tr><td>Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>Tanδ (max.)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td></tr></table> When the capacitance exceeds 1000μF, 0.02 shall be added every 1000μF increase.	Rated Voltage	6.3	10	16	25	35	50	63	Tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09														
Rated Voltage	6.3	10	16	25	35	50	63																								
Tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09																								
Low Temperature Characteristics (at 120 Hz)	Impedance ratio shall not exceed the values given in the table below. <table><tr><td>Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>Impedance Ratio</td><td>Z(-55℃) / Z(+20℃)</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table>	Rated Voltage	6.3	10	16	25	35	50	63	Impedance Ratio	Z(-55℃) / Z(+20℃)	3	3	3	3	3	3														
Rated Voltage	6.3	10	16	25	35	50	63																								
Impedance Ratio	Z(-55℃) / Z(+20℃)	3	3	3	3	3	3																								
Endurance	<table><tr><td rowspan="2">Time</td><td>6.3 ~ 10V</td><td>4,000 Hrs for φ D = 5 ~ 6.3 mm; 6,000 Hrs for φ D = 8 ~ 10 mm; 8,000 Hrs for φ D ≥ 12.5 mm</td></tr><tr><td>16 ~ 63V</td><td>5,000 Hrs for φ D = 5 ~ 6.3 mm; 7,000 Hrs for φ D = 8 ~ 10 mm; 10,000 Hrs for φ D ≥ 12.5 mm</td></tr><tr><td colspan="2">Capacitance Change</td><td>Within ± 25% of initial value</td></tr><tr><td colspan="2">Tanδ</td><td>Less than 200% of specified value</td></tr><tr><td colspan="2">Leakage Current</td><td>Within specified value</td></tr></table> * The above specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied with rated ripple current for 4,000 ~ 10,000 hours at 105℃.	Time	6.3 ~ 10V	4,000 Hrs for φ D = 5 ~ 6.3 mm; 6,000 Hrs for φ D = 8 ~ 10 mm; 8,000 Hrs for φ D ≥ 12.5 mm	16 ~ 63V	5,000 Hrs for φ D = 5 ~ 6.3 mm; 7,000 Hrs for φ D = 8 ~ 10 mm; 10,000 Hrs for φ D ≥ 12.5 mm	Capacitance Change		Within ± 25% of initial value	Tanδ		Less than 200% of specified value	Leakage Current		Within specified value																
Time	6.3 ~ 10V		4,000 Hrs for φ D = 5 ~ 6.3 mm; 6,000 Hrs for φ D = 8 ~ 10 mm; 8,000 Hrs for φ D ≥ 12.5 mm																												
	16 ~ 63V	5,000 Hrs for φ D = 5 ~ 6.3 mm; 7,000 Hrs for φ D = 8 ~ 10 mm; 10,000 Hrs for φ D ≥ 12.5 mm																													
Capacitance Change		Within ± 25% of initial value																													
Tanδ		Less than 200% of specified value																													
Leakage Current		Within specified value																													
Shelf Life Test	<table><tr><td>Test Time</td><td>1,000 Hrs</td></tr><tr><td>Capacitance Change</td><td>Within ± 25% of initial value</td></tr><tr><td>Tanδ</td><td>Less than 200% of specified value</td></tr><tr><td>Leakage Current</td><td>Within specified value</td></tr></table> * The above specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied.	Test Time	1,000 Hrs	Capacitance Change	Within ± 25% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Within specified value																						
Test Time	1,000 Hrs																														
Capacitance Change	Within ± 25% of initial value																														
Tanδ	Less than 200% of specified value																														
Leakage Current	Within specified value																														
Ripple Current and Frequency Multipliers	<table><tr><td> Freq.(Hz) Cap.(μF) </td><td>120</td><td>1k</td><td>10k</td><td>100k up</td></tr><tr><td>≤ ~ 33</td><td>0.42</td><td>0.70</td><td>0.90</td><td>1.0</td></tr><tr><td>39 ~ 270</td><td>0.50</td><td>0.73</td><td>0.92</td><td>1.0</td></tr><tr><td>330 ~ 680</td><td>0.55</td><td>0.77</td><td>0.94</td><td>1.0</td></tr><tr><td>820 ~ 1,800</td><td>0.6</td><td>0.80</td><td>0.96</td><td>1.0</td></tr><tr><td>2,200 ~ 18,000</td><td>0.7</td><td>0.85</td><td>0.98</td><td>1.0</td></tr></table>	Freq.(Hz) Cap.(μF)	120	1k	10k	100k up	≤ ~ 33	0.42	0.70	0.90	1.0	39 ~ 270	0.50	0.73	0.92	1.0	330 ~ 680	0.55	0.77	0.94	1.0	820 ~ 1,800	0.6	0.80	0.96	1.0	2,200 ~ 18,000	0.7	0.85	0.98	1.0
Freq.(Hz) Cap.(μF)	120	1k	10k	100k up																											
≤ ~ 33	0.42	0.70	0.90	1.0																											
39 ~ 270	0.50	0.73	0.92	1.0																											
330 ~ 680	0.55	0.77	0.94	1.0																											
820 ~ 1,800	0.6	0.80	0.96	1.0																											
2,200 ~ 18,000	0.7	0.85	0.98	1.0																											

Diagram of Dimensions

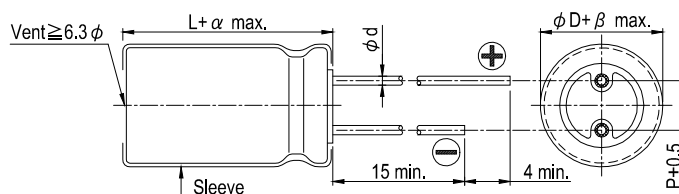


Lead Spacing and Diameter

Unit: mm

ϕD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ϕd	0.5		0.6			0.8	
α	L<20: 1.5, L $\geq$ 20: 2.0						
β	0.5						

The case size of 12.5×16, 16×16, 16×20, 18×16, 18×20 and 18×25 are suitable for below diagram:

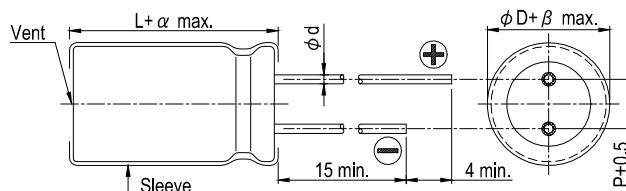



Dimension: $\phi D \times L(\text{mm})$
 Impedance: $\Omega/$ at 100k Hz
 Ripple Current: mA/rms at 105°C

Dimension and Permissible Ripple Current

Rated Volt. (V _{DC}) Contents Cap. (μF)	6.3V (0J)				10V (1A)				16V (1C)				25V (1E)			
	ϕ D×L	Impedance (Ω, max./100kHz)		Ripple Current (mA/rms, 105°C)	ϕ D×L	Impedance (Ω, max./100kHz)		Ripple Current (mA/rms, 105°C)	ϕ D×L	Impedance (Ω, max./100kHz)		Ripple Current (mA/rms, 105°C)	ϕ D×L	Impedance (Ω, max./100kHz)		Ripple Current (mA/rms, 105°C)
		20°C	-10°C			100k Hz	20°C			-10°C	100k Hz			20°C	-10°C	
47													5×11	0.58	1.16	210
56									5×11	0.58	1.16	210				
100					5×11	0.58	1.16	210					6.3×11	0.22	0.44	340
120									6.3×11	0.22	0.44	340				
150	5×11	0.58	1.16	210												
220					6.3×11	0.22	0.44	340	8×11.5	0.11	0.22	640	8×11.5	0.11	0.22	640
330	6.3×11	0.22	0.44	340					8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865
470					8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210
680	8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210	10×20 12.5×16	0.046 0.049	0.092 0.098	1,400 1,450
820	10×12.5	0.080	0.16	865									10×25	0.042	0.084	1,650
1,000	8×15	0.087	0.174	840	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210	10×20 12.5×16	0.046 0.049	0.092 0.098	1,400 1,450	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940
1,200	8×20 10×16	0.069 0.060	0.128 0.120	1,050 1,210	10×20	0.046	0.092	1,400	10×25	0.042	0.084	1,650	18×16	0.043	0.086	2,210
1,500	10×20	0.046	0.092	1,400	10×25 12.5×16	0.042 0.049	0.084 0.090	1,650 1,450	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940	12.5×25	0.027	0.054	2,230
1,800	12.5×16	0.045	0.090	1,450									12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530
2,200	10×25	0.042	0.084	1,650	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940	12.5×25 18×16	0.027 0.043	0.054 0.086	2,230 2,210	12.5×35 18×20	0.020 0.026	0.040 0.052	2,880 2,860
2,700	10×30 16×16	0.031 0.042	0.062 0.084	1,910 1,940	18×16	0.043	0.086	2,210	12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530	12.5×40 16×25	0.017 0.021	0.034 0.042	3,350 2,930
3,300	12.5×20	0.035	0.070	1,900	12.5×25	0.027	0.054	2,230	12.5×35	0.020	0.040	2,880	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140
3,900	12.5×25 18×16	0.027 0.043	0.054 0.086	2,230 2,210	12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×35.5 18×31.5	0.015 0.015	0.030 0.030	3,610 4,170
4,700	12.5×30	0.024	0.048	2,650	12.5×35	0.020	0.040	2,880	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140	16×40 18×35.5	0.013 0.014	0.026 0.028	4,080 4,220
5,600	12.5×35 16×20	0.020 0.027	0.040 0.054	2,880 2,530	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×35.5 18×31.5	0.015 0.015	0.030 0.03	3,610 4,170	18×40	0.012	0.024	4,280
6,800	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140	16×40	0.013	0.026	4,080				
8,200	16×31.5	0.017	0.034	3,450	16×35.5 18×31.5	0.015 0.015	0.030 0.030	3,610 4,170	18×35.5	0.014	0.02	4,220				
10,000	16×35.5 18×25	0.015 0.019	0.030 0.038	3,610 3,140	16×40 18×35.5	0.013 0.014	0.026 0.028	4,080 4,220	18×40	0.012	0.024	4,280				
12,000	16×40 18×31.5	0.013 0.015	0.026 0.030	4,080 4,170	18×40	0.012	0.024	4,280								
15,000	18×35.5	0.014	0.028	4,220												
18,000	18×40	0.012	0.024	4,280												



Dimension: $\phi D \times L(\text{mm})$

Impedance: $\Omega/$ at 100k Hz

Ripple Current: mA/rms at 105°C

Dimension and Permissible Ripple Current

Rated Volt. (Vdc) Contents Cap. (μF)	35V (1V)				50V (1H)				63V (1J)			
	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz
		20°C	-10°C			20°C	-10°C			20°C	-10°C	
3.3					5×11	2.9	5.8	53				
4.7					5×11	2.5	5.0	95				
10					5×11	2.0	4.0	130				
15									5×11	1.2	2.4	165
22					5×11	0.91	1.82	180				
33	5×11	0.58	1.16	210					6.3×11	0.49	0.98	265
56	6.3×11	0.22	0.44	340	6.3×11	0.39	0.78	295	8×11.5	0.31	0.62	500
82									8×15 10×12.5	0.22 0.15	0.44 0.30	665 690
100					8×11.5	0.22	0.44	555				
120					8×15	0.190	0.38	730	8×20 10×16	0.17 0.11	0.34 0.22	820 950
150	8×11.5	0.11	0.22	640	10×12.5	0.160	0.32	760				
180					8×20	0.17	0.34	880	10×20 12.5×16	0.078 0.101	0.156 0.202	1,150 1,150
220	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865	10×16	0.110	0.22	1,050	10×25	0.064	0.128	1,350
270	8×20	0.064	0.128	1,050	10×20 12.5×16	0.078 0.079	0.156 0.158	1,220 1,260	12.5×20	0.057	0.114	1,500
330	10×16	0.060	0.120	1,210	10×25	0.072	0.144	1,440				
390									12.5×25	0.043	0.086	1,900
470	10×20 12.5×16	0.046 0.049	0.092 0.098	1,400 1,450	10×30 12.5×20 16×16	0.056 0.059 0.072	0.112 0.118 0.114	1,690 1,660 1,690	12.5×30 16×20	0.039 0.045	0.078 0.090	2,300 2,000
560	10×25	0.042	0.084	1,650	12.5×25 18×16	0.044 0.070	0.088 0.140	1,950 1,930	12.5×35	0.034	0.068	2,500
680	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940	12.5×30	0.039	0.078	2,310	12.5×40 16×25 18×20	0.029 0.035 0.042	0.058 0.070 0.084	2,800 2,600 2,500
820					12.5×35 16×20	0.033 0.044	0.066 0.088	2,510 2,210	16×31.5 18×25	0.029 0.034	0.058 0.068	2,850 2,800
1,000	12.5×25 18×16	0.027 0.043	0.054 0.086	2,230 2,210	12.5×40 16×25 18×20	0.027 0.033 0.047	0.054 0.066 0.094	2,920 2,555 2,490	16×35.5	0.027	0.054	2,900
1,200	12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530	16×31.5 18×25	0.027 0.028	0.054 0.056	3,010 2,740	16×40 18×31.5	0.025 0.028	0.050 0.056	3,400 3,300
1,500	12.5×35	0.020	0.040	2,880	16×35.5	0.024	0.048	3,150	18×35.5	0.025	0.050	3,400
1,800	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×40 18×31.5	0.021 0.024	0.042 0.048	3,710 3,635	18×40	0.024	0.048	3,500
2,200	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140	18×35.5	0.022	0.044	3,680				
2,700	16×35.5 18×31.5	0.015 0.015	0.030 0.030	3,610 4,170	18×40	0.018	0.036	3,800				
3,300	16×40 18×35.5	0.013 0.014	0.026 0.028	4,080 4,220								
3,900	18×40	0.012	0.024	4,280								

Part Numbering System

RZW Series 470μF ± 20% 16V Bulk Package Gas Type 8 ϕ × 15L General Purpose
RZW **471** **M** **1C** **BK** - **0815**
 Series Name Capacitance Capacitance Tolerance Rated Voltage Lead Configuration and Package Rubber Type Case Size Application

Note: For more details, please refer to "Part Numbering System - Radial Type" on page 139.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) ***category:***

Click to view products by [Lelon](#) ***manufacturer:***

Other Similar products are found below :

[ECE-A1EGE220](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#) [NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#)
[NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#) [ES5107M016AE1DA](#) [227RZS050M](#) [477RZS050M](#)
[UVX1V222MHA1CA](#) [VTL100S10](#) [VTL470S10](#) [511D336M250EK5D](#) [ECE-A1CF471](#) [ERZA630VHN182UP54N](#) [GF100/25](#) [GF220/35](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#)
[NEV4700M35HI](#) [NEV4.7M100BA](#) [NEV47M16BA](#) [NEV47M50CB-BULK](#) [NEVH1.0M350AB](#) [NEVH2.2M160AB](#) [NEVH3.3M350BC](#)
[TER330M50GM](#) [477KXM035MGBWSA](#) [ESMG160ETD221MF11D](#) [ESMG160ETD101ME11D](#) [NEV1500M25-BULK](#) [NEV470M50FF-](#)
[BULK](#) [NEV330M25DE-BULK](#) [NEV3300M16FH-BULK](#) [NEV100M100EE-BULK](#) [VHT470M50-BULK](#) [VHT100M50-BULK](#)
[VHT2200M35-BULK](#) [LKMD1401H221MF](#) [B41888G6108M000](#)