

Product Overview

M8Con-3-F-SC-R/ M8Con-4-F-SC-R

M8 Female 3 or 4 position Panel mounted Connector Solder Type Rear Fastened



3 position female connector

IP67 M8 straight shielded PCB Panel Mount 3 or 4 pin A coded connector. Designed for Sensors, actuators, and industrial controllers. 8mm threaded joint, quick easy mating and locking, even in places difficult to reach. Anti-vibration locking design.

Rated Current: 4A.

Rated Voltage: 60V.

Connector mounting: Rear fastened.

Mechanical Operation: >500 mating cycles.

Ingress Protection: IP67/IP68.

Insulation Resistance: $\geq 100\text{M}\Omega$.

Contact Resistance: $\leq 5\text{m}\Omega$.

Operating Temperature: -20°C to 80°C .

Materials and Coatings:

Contact Pin: Brass with gold plated.

Contact Termination: Solder cup.

O-ring Seal: Epoxy resin/FKM.

Hex Nut: Brass with nickel plated.


Screw Thread: M8X1.

Standard: IEC 61076-2-104



4 position female connector

Dimensions in mm:

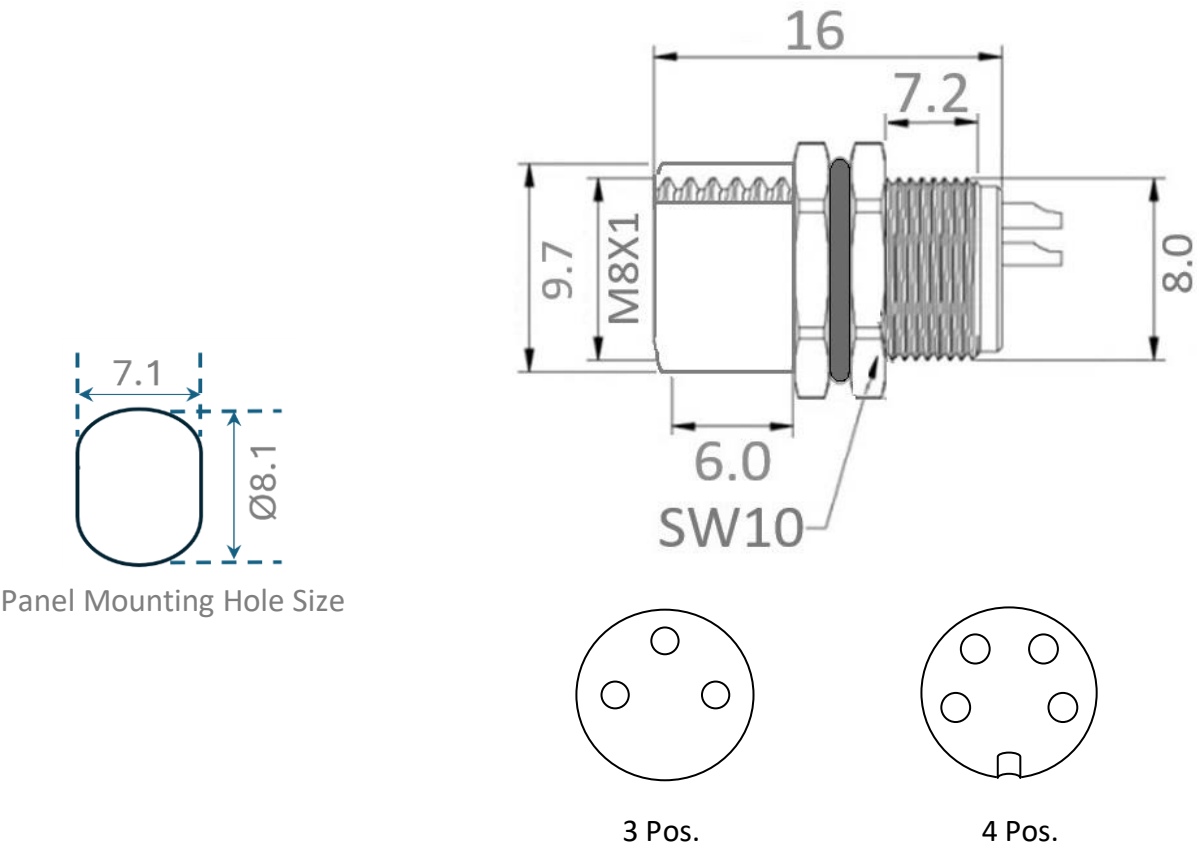

Ordering information

Name	Description	Order Code
M8Con-3-F-SC-R	M8 3 pin female circular panel mount connector	M8Con-3-F-SC-R
M8Con-4-F-SC-R	M8 4 pin female circular panel mount connector	M8Con-4-F-SC-R
Date	Notes	
30 April 2024	Document version: v1.0	Initial Release



LPRS

Low Power Radio Solutions Ltd
Two Rivers industrial Estate
Station Lane, Witney OX28 4BH, UK
+44(0) 1993 709418
sales@lprs.co.uk

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [LPRS](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [8R5000A16M005](#) [1-3637-600-5205](#) [1545399](#) [1A4000-348](#) [8R4006A16M010](#) [8R5006A18A120](#) [1R3006A20M005](#)
[1R3006A20M030](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-01016](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [41-40005](#) [XS3P-M421-2](#)
[600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R5006A16M020](#) [8R5006A16M005](#) [7A3006-32](#) [1R3004A20A1201](#) [1605332](#) [N03FA03144](#)
[1406328](#) [XS2RD4265](#) [080804EMF00000](#) [XS2R-D426-1](#) [XS8A-0441](#) [2273142-2](#) [41-50000](#) [41-50002](#) [ASB 8-S3064/5 M](#) [43-02534](#)
[MA1LKE1700](#) [1400943](#) [8R4006A16M020](#) [WR8U26E02C300](#) [8R5000A16M020](#) [884A30K05M006](#) [1200910005](#) [1201010003](#) [2168083-2](#)
[RC-Z2062](#) [SACC-MSQ-M12MS-25-3 2 SCO](#) [SACC-E-FSB-5CON-M16/0 5 SC](#) [SACC-DSI-FS-4CON-PG9/2 0UL](#) [SACC-1/2 NPT-](#)
[LOCKNUT](#) [BEDC854NN0000052A000](#)