


**■Features**

- High Luminous LED
- 3mm Round Standard Directivity
- Long Lifetime Operation
- Superior UV Resistance
- Color Diffused / White Diffused (W, M only)

**■Applications**

- General Purpose Indicators
- Decorations
- Toys & Games
- General Use

**■Outline Dimension**

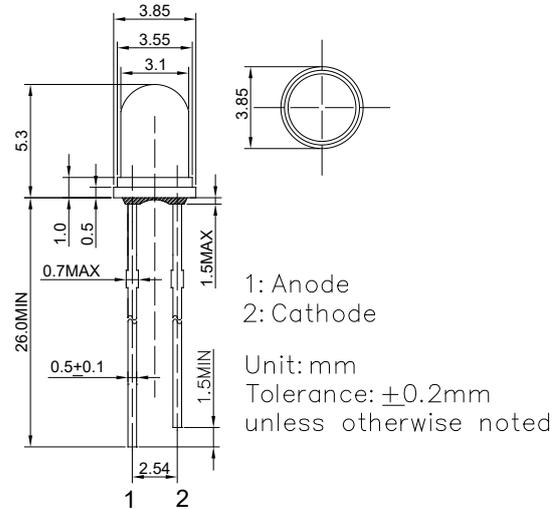


**■Absolute Maximum Rating**

( $T_a=25^\circ\text{C}$ )

Item	Symbol	Value		Unit
		W/M/B/PG	YG/Y/O/R	
DC Forward Current	$I_F$	30	30	mA
Pulse Forward Current#	$I_{FP}$	100	100	mA
Reverse Voltage	$V_R$	5	5	V
Power Dissipation	$P_D$	102	78	mW
Operating Temperature	$T_{opr}$	-30 ~ +85		$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 ~ +100		$^\circ\text{C}$
Lead Soldering Temperature	$T_{sol}$	260 $^\circ\text{C}$ /5sec		-

**■Directivity**

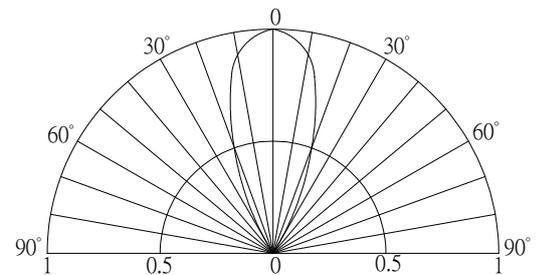

#Pulse width Max 0.1ms, Duty ratio max 1/10

**■Electrical -Optical Characteristics**

( $T_a=25^\circ\text{C}$ )

Part Number	Color		$V_F$ (V)*			$I_R$ ( $\mu\text{A}$ )	$I_v$ (mcd)*			$\lambda_D$ (nm)*			2 $\theta$ 1/2(deg)
			Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
			$I_F=20\text{mA}$			$V_R=5\text{V}$	$I_F=20\text{mA}$						
OSW5YK3M42A	White	W	-	2.9	3.4	10	750	1120	-	*CCT: 8500-18000K			40
OSM5YK3M42A	Warm White	M	-	2.9	3.4	10	750	1120	-	*CCT: 2700-3200K			40
OSB5YU3M44A	Blue	B	-	2.9	3.4	10	330	500	-	465	470	475	40
OSG5TA3M44A	Pure Green	PG	-	2.9	3.4	10	750	1120	-	520	525	530	40
OSG8HA3M44A	Yellow Green	YG	-	2.1	2.6	10	150	220	-	565	570	575	40
OSY5JA3M44A	Yellow	Y	-	2.1	2.6	10	220	330	-	585	590	595	40
OSO5JA3M44A	Orange	O	-	2.1	2.6	10	220	330	-	600	605	610	40
OSR5JA3M44A	Red	R	-	2.1	2.6	10	220	330	-	620	625	630	40

\*1 Tolerance of measurements of domi. wavelength is  $\pm 1\text{nm}$

\*2 Tolerance of measurements of chromaticity coordinates is  $\pm 10\%$

\*3 Tolerance of measurements of luminous intensity is  $\pm 15\%$

\*4 Tolerance of measurements of forward voltage is  $\pm 0.1\text{V}$

LED & Application Technologies



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Optosupply](#) manufacturer:*

Other Similar products are found below :

[OECCDD01-300](#) [OECCDD02-300](#) [OECCDD02-350](#) [OECCDD02-450](#) [OECCDD02-600](#) [OECCDD02-700](#) [OEHW2030GF](#) [OEHW2045GF](#)  
[OEHW2060GF](#) [OEHW2090GF](#) [OKLEDT02406A](#) [OKLEDT3050G5V](#) [OKLEDT3050M3V](#) [OKLEDT3050RBV](#) [OKLEDT3050RBW](#)  
[OKLEDT3050RPV](#) [OKLEDT3050RPW](#) [OKLEDT3100B5](#) [OKLEDT3100G8](#) [OKLEDT3100M3](#) [OKLEDT3100M4](#) [OKLEDT3100R6](#)  
[OKLEDT3100W6](#) [OKLEDT3100WA](#) [OKLEDT3100Y5](#) [OKLEDT31203A](#) [OKLEDT5050G5V](#) [OKLEDT5050G5W](#) [OKLEDT5050RPW](#)  
[OKLEDT5050TAV](#) [OKLEDT5050TAW](#) [OKLEDT5050W6P](#) [OKLEDT5050WAV](#) [OKLEDT5050WAW](#) [OKLEDT50606A](#)  
[OKLEDT50606B](#) [OKLEDT51005A](#) [OKLEDT5100B5](#) [OKLEDT5100G8](#) [OKLEDT5100M3](#) [OKLEDT5100M4](#) [OKLEDT5100R6](#)  
[OKLEDT5100W6](#) [OKLEDT5100WA](#) [OKLEDT5100Y5](#) [OKLEDT51203A](#) [OKLEDT51206A](#) [OKLEDT8050G5W](#) [OKLEDT8050M3V](#)  
[OKLEDT8050R5V](#)