

DIN15W48

48V/15.36W Din Rail Power Supply



■ Features:

- Constant voltage design
- European AC input range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
 - Isolation class II
- Can be installed on DIN Rail TS-35/7 or 15
 - MTBF 200.000 h

SELV

ELECTRICAL SPECIFICATION

MODEL	DIN15W48					
OUTPUT						
Rated Voltage	48V					
Rated Current	0.32A					
Current Range	0 ÷ 0.32A					
Rated Power	15.36W					
No Output Voltage (max)	52V					
Voltage Adjustment Range [6]	41-55V					
Line Regulation	± 1%					
Load Regulation	± 1%					
Tolerance [3]	± 5%					
Ripple & Noise (max.) [2]	300mV _{P-P}					
Setup, Rise Time [4]	max 820ms, 70ms / 230VAC at full load					
Hold up Time (typ.)	65ms / 230VAC at full load					
INPUT						
Voltage Range	180 ÷ 264VAC					
Frequency Range	47 ÷ 63Hz					
Inrush current	75A at 230VAC cold start at 25°C					
Efficiency (typ.)	>81.96% - Average (25%+50%+75%+100%) / 4					
AC Current (typ.)	0.35A / 230VAC					
Leakage current	<1.5mA at 50/60Hz 240VAC INPUT					
Max. No. Of PSU on Circuit Breaker	B10	B16	C10	C16	D10	D16
	22	35	22	35	45	72
No load Power Consumption (max.)	<0.5W					

DIN15W48

48V/15.36W Din Rail Power Supply



PROTECTIONS

Over Current	Range 120 ÷ 180% Type: hiccup mode. Recovers automatically after fault condition is removed.
Short Circuit	Type: hiccup mode. Recovers automatically after fault condition is removed.
Over Voltage	72V Type: hiccup mode. Recovers automatically after fault condition is removed.
Over Temperature	Range: NTC detect Type: shut down output voltage. Re-power on to recovery.

WORKING ENVIRONMENT

Working Temperature	-20°C ÷ +50°C, ambient derate each output at 4.0% per degree from 50°C to 60°C
Working Humidity	5 ÷ 95% RH non-condensing
Storage Temperature and Humidity	-30°C ÷ +70°C, 5 ÷ 95% RH non-condensing

SAFETY and EMC REGULATIONS

Safety Standards	Compliance to EN 62368-1
Withstand Voltage	IN/OUT: 3kVAC, IN/GND: 2kVAC, OUT/GND: 0.5kVAC
EMC Emission	Compliance to EN55032
EMC Immunity	Compliance to EN55035
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2

OTHERS

Dimensions	25 x 92.5 x 56mm (L x W x H)
Weight and Packing	94g; 100pcs. /Box; weight box and dimensions: 10.5kg; 33.3 x 23.3 x 33.5cm

MECHANICAL SPECIFICATION

PIN ASSIGNMENT

NO.	Assignment
1	Input: AC/N
2	Input: AC/L
3	Output: U _{OUT} +
4	Output: U _{OUT} -
7	LED indication for power on
8	U _{OUT} adjustment




DIN15W48

48V/15.36W Din Rail Power Supply



MECHANICAL SPECIFICATION:

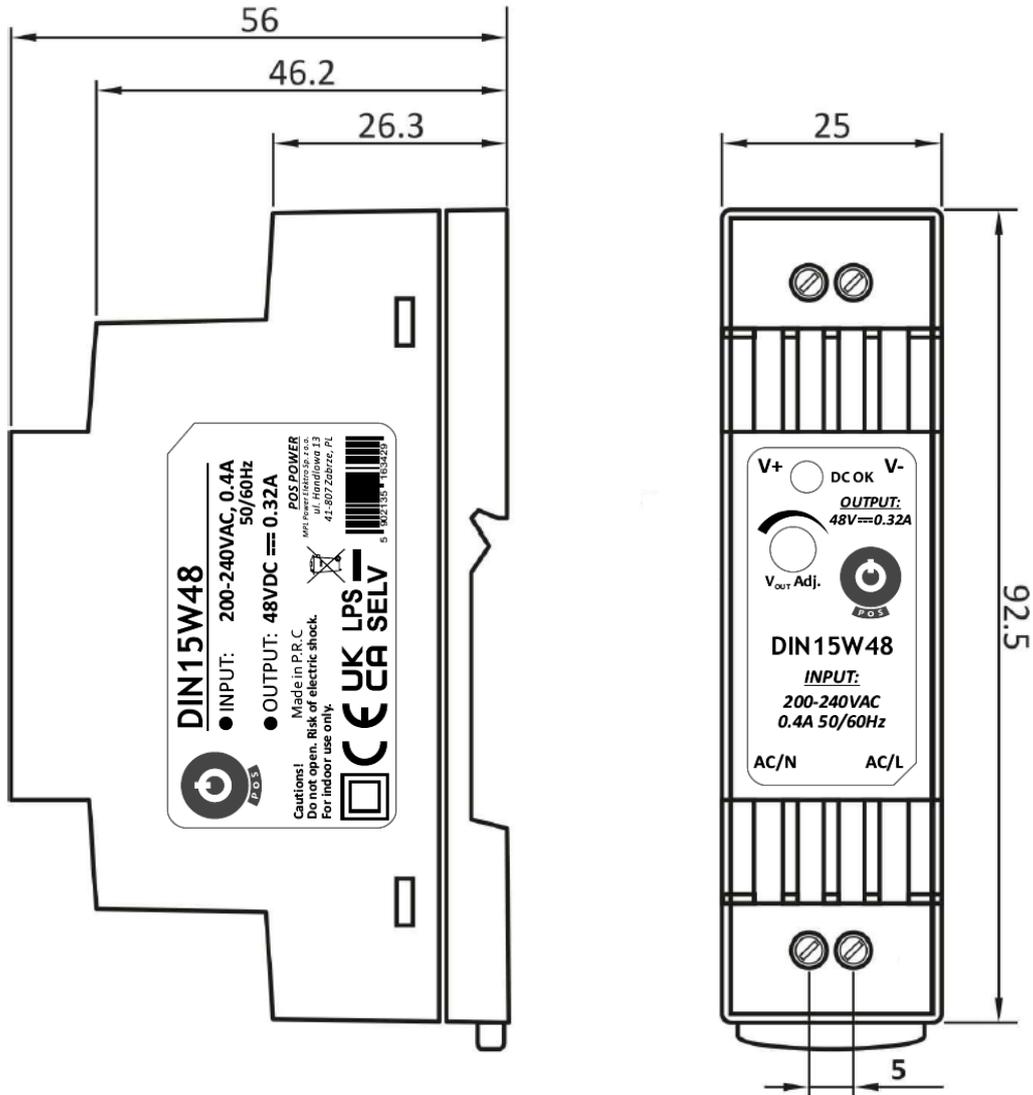

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.
6. By built-in potentiometer.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Power Supplies](#) category:

Click to view products by [POS manufacturer](#):

Other Similar products are found below :

[DVP01PU-S](#) [DVPPS01](#) [DVPPS02](#) [ADNB040-24-1PM-C](#) [SS14011524](#) [PSC-6024](#) [PS-C12024](#) [PSC-2024](#) [96PSD-A40W24-MM](#) [PSD-A120W12](#) [NDR-7524](#) [787-1200.](#) [AMED75-48SJZ](#) [1SVR427043R1200](#) [50995](#) [50903](#) [EL50-D](#) [18924-9989](#) [50996](#) [HDN-3024](#) [ISED-120-24](#) [1335699](#) [1335698](#) [SPM3051](#) [POS DIN30W24](#) [SPB-015-12](#) [EL50-B](#) [50905](#) [DRB240-48-1](#) [DRS-480-48](#) [POS DIN30W15](#) [POS MDIN60W12](#) [18924-9988](#) [HDN-3012](#) [DRB480-48-3-A1](#) [CFM50S240-SD](#) [DRB480-24-3-A0](#) [DRB240-24-3-A0](#) [DRB480-72-3-A1](#) [DRB480-72-3-A0](#) [POS DIN60W24](#) [XCSD1030W012VAA](#) [DRB120-12-3-A1](#) [POS DIN60W15](#) [CFM70S050-SD](#) [DRB960-24-3-A0](#) [50904](#) [SPB-030-12](#) [DRB480-48-3-A0](#) [DRB960-24-3-A1](#)