

**MODEL:** CPT-3016C-120 | **DESCRIPTION:** PIEZO BUZZER TRANSDUCER**FEATURES**

- externally driven
- wave solderable
- 100 dB SPL


**SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated voltage			12		Vdc
operating voltage		5.5		16	Vdc
current consumption	at rated voltage			20	mA
rated frequency		2,900	3,400	3,900	Hz
sound pressure level	at 10 cm, rated voltage	100			dB
dimensions	Ø30.6 x 16				mm
weight				5.7	g
material	PBT +15% glass				
terminal	pin type [Au plating]				
operating temperature		-30		100	°C
storage temperature		-40		110	°C
RoHS	yes				

Notes: 1. All specifications measured at 5-35°C, humidity at 45-85%, under 86-106 kPa pressure, unless otherwise noted.


SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for maximum 5 seconds	330		380	°C
wave soldering	see wave soldering profile			260	°C

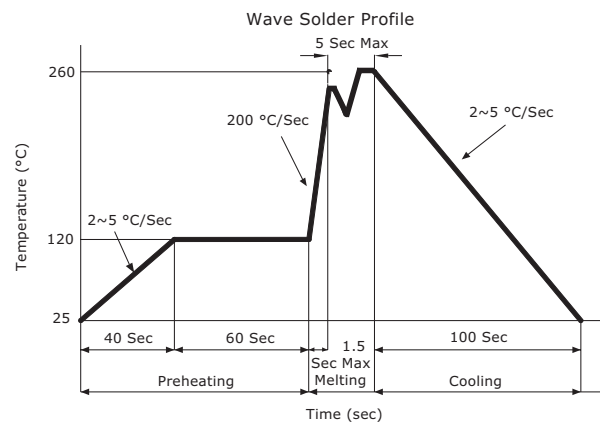


MECHANICAL DRAWING

units: mm
tolerance: ± 0.5 mm

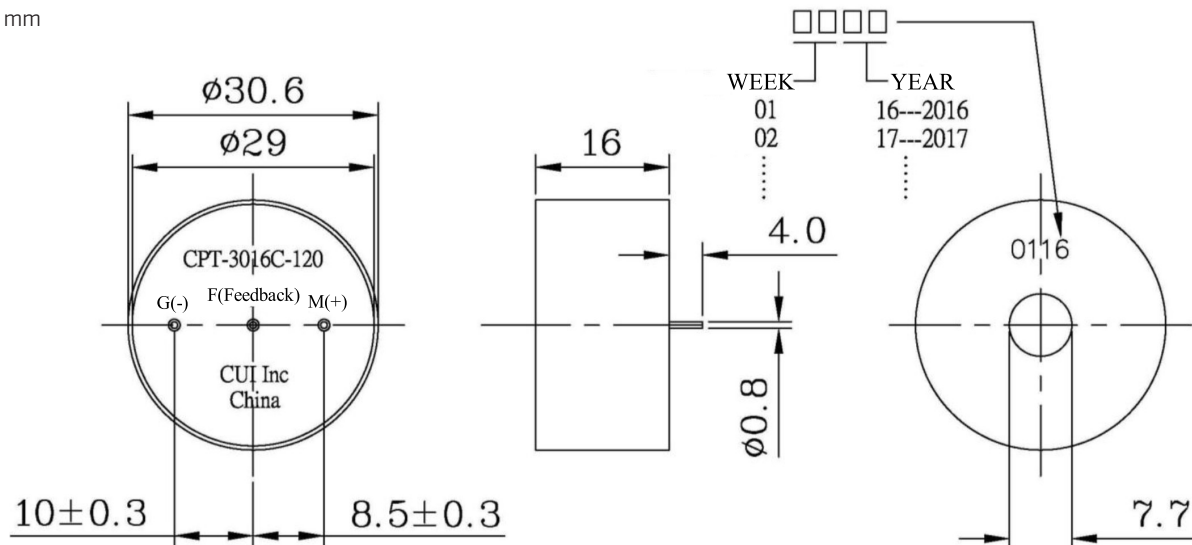


PERFORMANCE CURVES


Voltage vs. Sound Pressure Level
at 10 cm

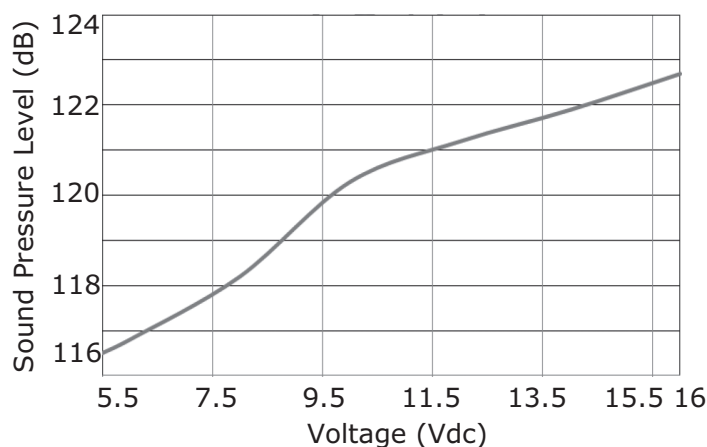

Voltage vs. Current Consumption

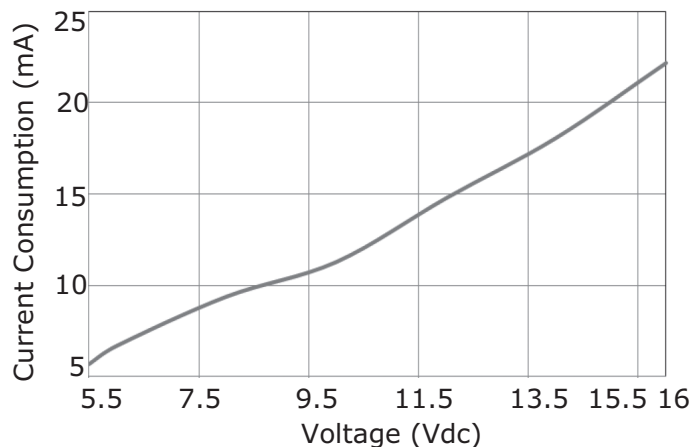

DRIVING CIRCUIT

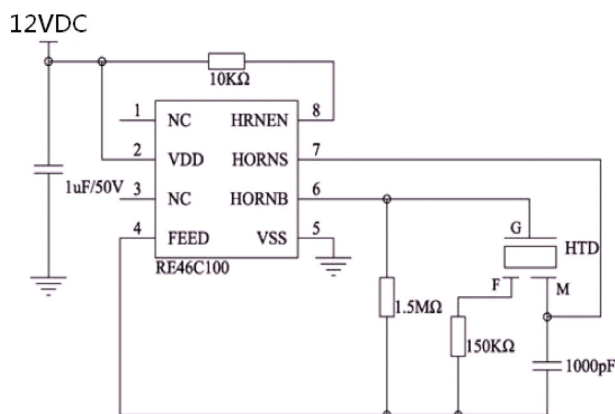


Notes: 1. The current consumption and the sound pressure level are measured by using the recommended driving circuit shown above.

PACKAGING

units: mm

Outer Box Size: 275 x 175 x 28 mm
Carton Size: 380 x 300 x 325 mm
Outer Box QTY: 48 pcs per outer box
Carton QTY: 960 pcs per carton

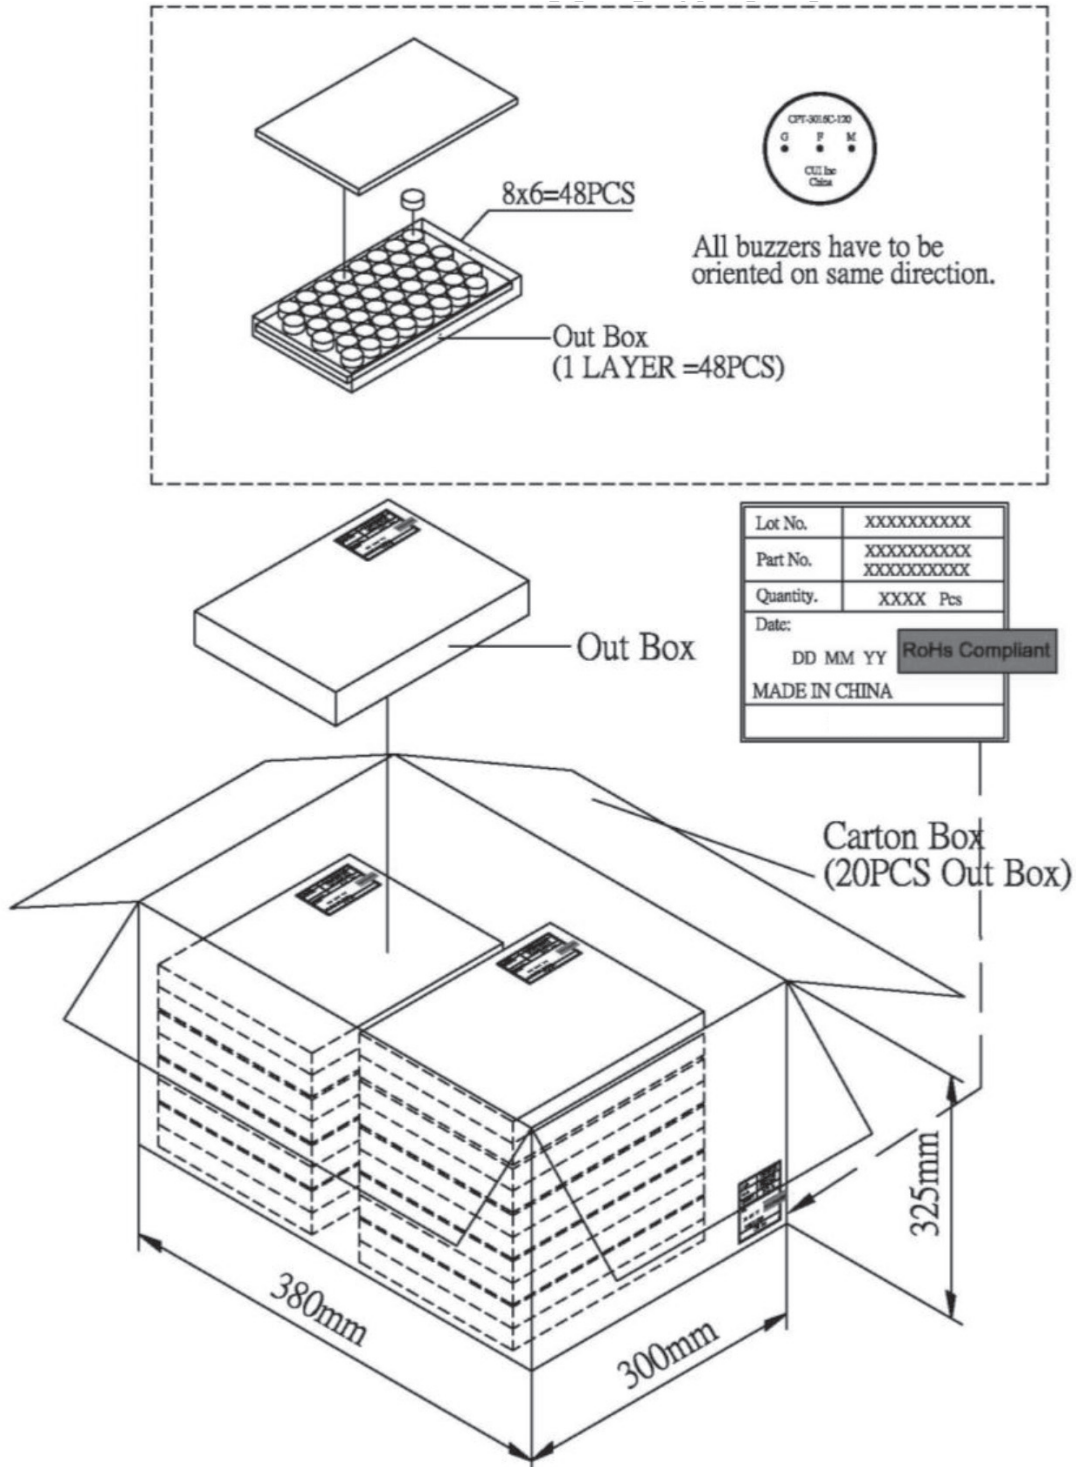

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Buzzers & Audio Indicators - Board Mount](#) ***category:***

Click to view products by [Same Sky](#) ***manufacturer:***

Other Similar products are found below :

[FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PT-3534FP](#) [SC110E](#) [SC616N-2](#) [SCS045MD9DT3S](#) [F/BC 35-DR LF](#) [F/EB20P-DR LF](#)
[FSMD8585JSLF](#) [F/TCW 05 WITH LABEL LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [F-B-P1405ISB LF](#) [F/DGX 05P WITH LABEL LF](#) [F/HCW 06 WITH LABEL LF](#) [DMT-1606S-NL](#) [SBM616J](#) [SBM616PU](#) [SC250H](#) [SC628FK](#)
[32S4120LFPN](#) [PLD-27N35PQ](#) [SMA-17-S](#) [SC235AF](#) [SMA21-P175](#) [1602AC-23-18E-26.000000G](#) [710000013](#) [710100108](#) [710121005](#)
[205311](#) [HNR-1704A](#) [KC1206 16](#) [FUET-1760](#) [FUET-1030H](#) [CPT-1117-83-SMT-TR](#) [CMA-6542PF](#) [CEM-1212S](#) [CMT-4023S-SMT-TR](#)
[CMT-8504-100-SMT-TR](#) [CX-0905C](#) [FMB09A12-12V](#) [FSD-5037](#) [FUET-1365F-05](#) [FSD-3020-12V](#) [SEA-0955Y-0527-16-50P4.0](#) [KC1206R](#)
[42](#) [FSD-2316-24V](#) [LEB1370BS-1.5S-2.4-R](#) [LEB1310BS-05S-2.4-R](#)