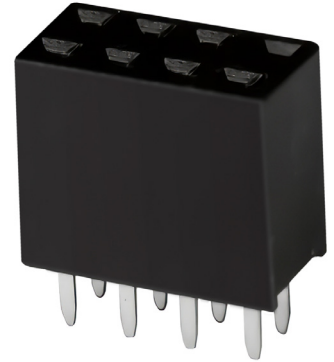


**SERIES:** SSK04-FPH-254 | **DESCRIPTION:** RECTANGULAR CONNECTOR**FEATURES**

- female pin header
- 2.54 mm pitch
- straight pins
- double row
- gold flash

**SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated voltage				250	V
rated current				3	A
dielectric withstanding voltage	at 2 mA cut-off current for 1 minute		500		Vac
contact resistance	measured at 1 kHz AC, 100 mA			20	mΩ
insulation resistance	at 1,000 Vdc for 1 minute	1,000			MΩ
retention force	per pin	0.7			kgf
insertion force	per pin			0.3	kgf
withdrawal force	per pin	0.05			kgf
life			100		cycles
operating temperature		-40		105	°C
flammability rating	UL94V-0				
RoHS	yes				

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
wave soldering	for 3±0.5 seconds	240	245	250	°C

PART NUMBER KEY**SSK04 - FPH - 254 - B XX**

Base Number


No. of Poles:

2	12
3	13
4	14
5	15
6	16
7	17
8	18
9	19
10	20
11	

MECHANICAL DRAWING

units: mm
tolerance:
X.X ±0.30 mm
X.XX ±0.20 mm
X.XXX ±0.15 mm
unless otherwise noted

DESCRIPTION	MATERIAL	PLATING/COLOR
housing	PA6T [UL94V-0]	black
contacts	brass	0.2 μ" min gold flash over nickel

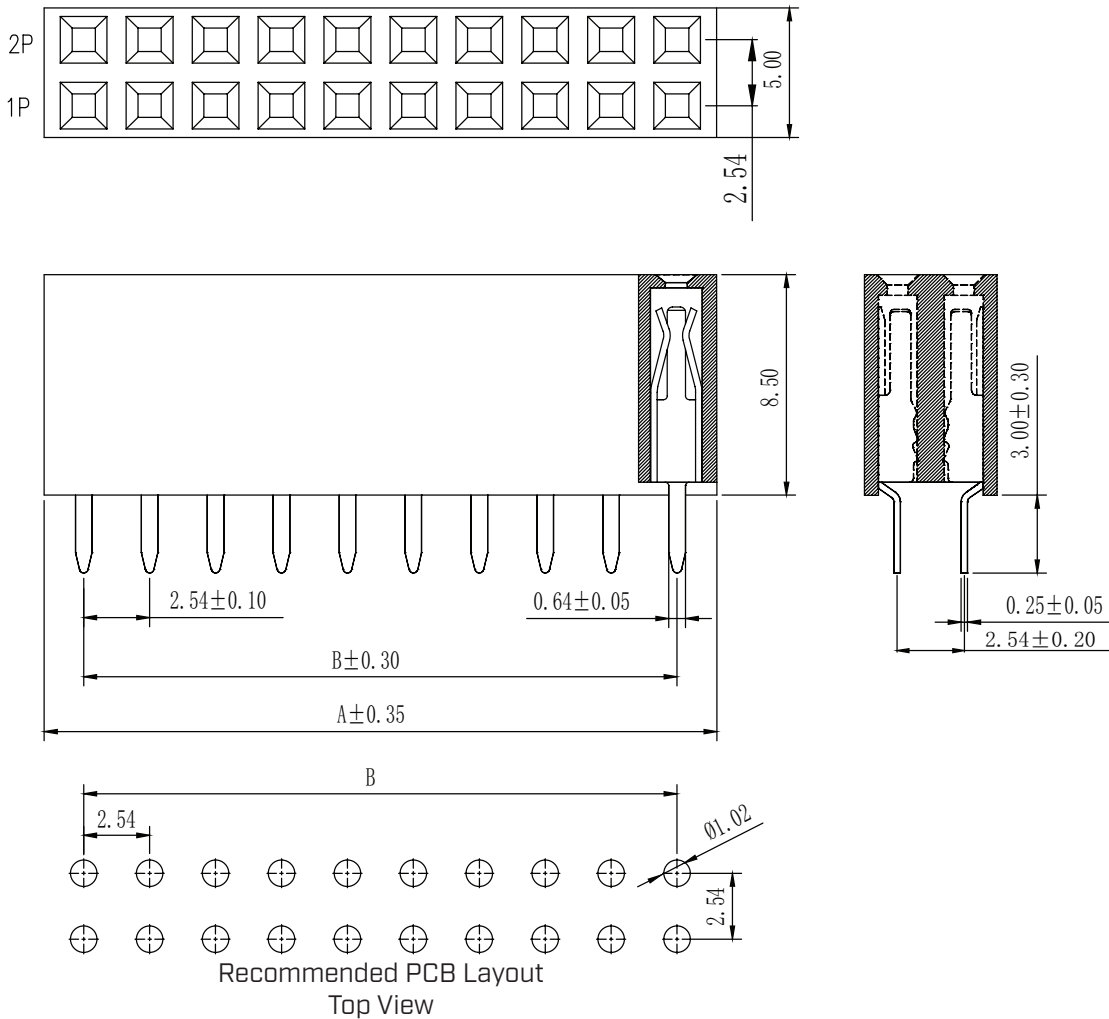

This series is constructed of single piece modules where A & B are length dimensions and N is the number of poles.												
N	02	03	04	05	06	07	08	09	10	11	12	13
A	5.58	8.12	10.66	13.20	15.74	18.28	20.82	23.36	25.90	28.44	30.98	33.52
B	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	25.40	27.94	30.48
N	14	15	16	17	18	19	20					
A	36.06	38.60	41.14	43.68	46.22	48.76	51.30					
B	33.02	35.56	38.10	40.64	43.18	45.72	48.26					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Same Sky](#) ***manufacturer:***

Other Similar products are found below :

[0010894062](#) [0010977306](#) [0015477636](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [636-1030](#) [641938-9](#) [65692-001LF](#) [65781-018](#) [65817-010LF](#) [65817-015LF](#) [68645-018](#) [699319-000](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [MMS10801TSV](#) [850-10-006-10-001000](#) [852-10-016-10-001000](#) [852-10-026-10-001000](#) [856-10-002-40-001000](#) [PH2-08-SGA](#) [90309-118LF](#) [90309-912LF](#) [93111-517LF](#) [94277-110LF](#) [98031-0001](#) [98416-S06B16ULF](#) [99.234.9999](#) [99.234.9999.6](#) [99.238.9999.6](#) [99.242.9999.6](#) [1-2169662-0](#) [1-2169663-0](#) [1-22284-0](#) [DAMM3W3PA183](#) [134-10-308-00-020000](#) [1347260000](#)