

Bellows suction cups (round)

FSG 88 NK-45 G1/4-IG

Part no.:10.01.06.00450

<https://www.schmalz.com/10.01.06.00450>

Home > Vacuum Technology for Automation > Vacuum Components > Vacuum Suction Cups > Bellows Suction Cups (Round) > Bellows Suction Cups FSG (2.5 Folds) > FSG 88 NK-45 G1/4-IG

Bellows suction cup (round) for very uneven workpieces



Size: 88

Suction cup material: Natural Rubber NK

Material hardness [Shore A]: 45 Shore A


Nipple material: Aluminum

Connection: G1/4"-F

Number of folds: 2.5

Vacuum connection: G1/4"-F

Design Data

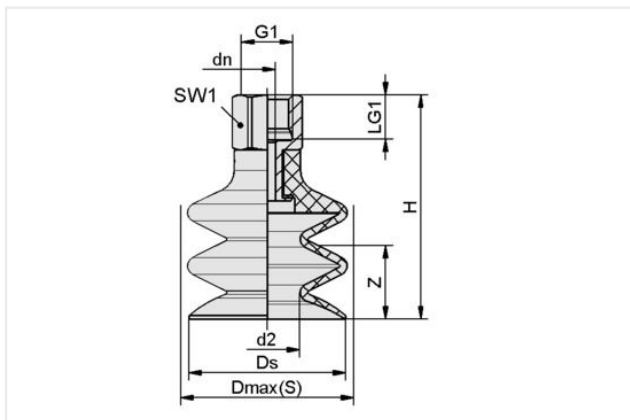

Attribute	Value
d2	29.30 mm
dn	8.20 mm
Dmax(S)	95.50 mm
Ds	89 mm
G1	G1/4"-F
H	101.50 mm
LG1	12 mm
SW1	21 mm
Z (Stroke)	34 mm

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Technical Data

Attribute	Value
Suction cup material	Natural Rubber NK
Material hardness [Shore A]	45 Shore A
Size	88
Number of folds	2.50
Connection	G1/4-IG
Curve radius (min) (convex)	100 mm
Volume	143.67 cm ³

Contact Schmalz

Schmalz Sp.z.o.o. | ul. Fabianowska 131/A1, 62-052 Komorniki, Poland | +48 61 628 67 70 | schmalz@schmalz.pl

Bellows suction cups (round)

FSG 88 NK-45 G1/4-IG

Part no.:10.01.06.00450

<https://www.schmalz.com/10.01.06.00450>

Suction force (-600mbar)	40.46 N
Pull-off force	286 N
Hose diameter (empf.) d	9 mm
Weight	180 g
Product family	FSG

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor Pull-off force: The pull-off force of the versions made of natural rubber is reduced by about 40% Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Accessories



DR 88/64x5 MOS SI-15

Part no.:10.01.06.02620

External diameter D: 88 mm

Internal diameter d: 64 mm

Height H: 5 mm

Material type: Foam rubber

Sealing material: Silicone SI

Material hardness [Shore A]: 15 Shore A



SU 70

Part no.:10.01.01.12838

Size: 70

Clamping range: 65.0 ... 80.0 mm

Temperature resistance: 80 °C

Spare parts

Contact Schmalz

Schmalz Sp.z.o.o. | ul. Fabianowska 131/A1, 62-052 Komorniki, Poland | +48 61 628 67 70 | schmalz@schmalz.pl

Bellows suction cups (round)

FSG 88 NK-45 G1/4-IG

Part no...:10.01.06.00450

<https://www.schmalz.com/10.01.06.00450>



SA-NIP N019 G1/4-IG DN820

Part no...:10.01.06.01960

Nipple family: N 019

Thread G1: G1/4"-F

Length L1: 38 mm

Fitting length: 15 mm

Nominal diameter dn: 8.2 mm

Spanner size SW2: 8 mm

Material: Aluminum



FG 88 NK-45 N019

Part no...:10.01.06.00460

Size: 88

Suction cup material: Natural Rubber NK

Material hardness [Shore A]: 45 Shore A

Number of folds: 2.5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bench Top Tools](#) category:

Click to view products by [SCHMALZ](#) manufacturer:

Other Similar products are found below :

[0027](#) [6104-201-2102](#) [6104-201-2502](#) [6-1372442-6](#) [62500-1584](#) [63801-7252](#) [63801-7274](#) [69002-5525](#) [691667-1](#) [904449-1](#) [9-22280-9](#) [1-1901086-7](#) [1-1976053-3](#) [1-2119644-2](#) [1-21000-6](#) [122983-1](#) [1424264-1](#) [1428211-1](#) [18023-9](#) [189763-1](#) [1901726-1](#) [1954222-1](#) [2079747-1](#) [21001-2](#) [992342-2](#) [2063796-1](#) [2119645-1](#) [2-21000-5](#) [2217396-1](#) [23238-1](#) [250609-000](#) [312324-1](#) [354005-2](#) [4-21000-0](#) [310600-1](#) [376166376170](#) [39380](#) [458267-1](#) [461061-1](#) [464923-1](#) [Y6326-208-21336000](#) [108821-ZZ](#) [6104-201-2302](#) [6104-202-1502](#) [6104-203-2502](#) [6104-204-1702](#) [6104-213-0902](#) [6326-208-21336](#) [5-21084-1](#)