

## Type BDS100 Series

### Key Features

- 100W in a 9.5cm<sup>2</sup> footprint
  - Gives an impressive power density of 10.5W/cm<sup>2</sup>
- Virtually inductance-free
  - Inductance < 40nH
- Wide resistance range: 0.47Ω to 1MΩ
  - Coupled with 1% tolerance gives ultimate design flexibility
- Multiple terminal configurations and multi-resistor packages
  - The space saving solution
- Partial discharge <10pC at 2kV
  - Guaranteeing quality, reliability and long life

### Applications

- Snubbing (Low inductance)
- Balancing Resistor (Multi-resistor package)
- Filter (Low inductance)
- High Voltage
- High Frequency



With less than 40nH inductance and a 100Watt power rating in an easy-mounting 38mm x 25mm Isotop case, the BDS100 offers high power density over a wide range of ohmic values (R47 – 1MΩ) and benefits from 10 years experience in the field. Available in 6 resistor configurations with 2 or 4 easy to connect terminals, the resistors are made from quality materials for optimum reliability and stability with very low partial discharge.

TE Connectivity can test resistors to conform to relevant customer specifications, and will advise on the use of resistors for pulse energy and high voltage applications (HV designs available). Resistors with alternative terminations or flying leads are available, and custom designs are welcome. This product is available via distribution.

### Characteristics -Electrical

<b>Resistance Range:</b>	R47 - 1MΩ	
<b>Resistance Tolerance:</b>	± 10%, 5% (Tighter by discussion)	
<b>TCR:</b>	R<1Ω	± 250ppm/°C
	R>1Ω	± 150ppm/°C
<b>Rated Power:</b>	Heatsink: 115°C / 100°C / 60°C	25W / 50W / 100W
<b>Capacitance:</b>	Parallel	15pF
		To Earth 40pF
<b>Series Inductance:</b>	40nH (Maximum)	
<b>Limiting Element Voltage:</b>	(100W or Less)	500Vdc/ac rms
<b>Isolating Voltage:</b>	(Terminal to Heatsink)	2.5kVac rms
<b>Single Shot Voltage:</b>	1.5/50ms	4kV
<b>Insulation Resistance:</b>	(at 500V dc)	>100GΩ
<b>Partial Discharge:</b>	at 2kV	<10pC
<b>Heat Dissipation:</b>	Although the use of proprietary heat sinks with lower thermal resistance is acceptable, up rating is not recommended. The use of proprietary heat sink compound to improve thermal conductivity is essential.	

### Characteristics - Environmental


<b>Endurance (Rated Power):</b>	2000cyc. at P <sub>Rated</sub>	ΔR 0.25% Typ
<b>Humidity Load Life:</b>	56 Days, 40°C, 95% RH	ΔR 0.25% Typ (I.R.>10GΩ)
<b>Temperature Cycling:</b>	-55°C to +125°C, 5cycles	ΔR 0.25% Typ
<b>Operating Storage Temp:</b>	-55°C to +125°C	
<b>Short Term Overload:</b>	3 x P <sub>Rated</sub> (10s)	ΔR 0.25% Typ
<b>Vibration:</b>	10/500Hz	ΔR 0.25% Typ
<b>Bump:</b>	40g 4000 bumps	ΔR 0.25% Typ

## Type BDS100 Series

### Characteristics - Mechanical

<b>Terminal Size:</b>	M4
<b>Terminal Torque (max.):</b>	1.3Nm
<b>Creepage Distance:</b>	10mm
<b>Clearance:</b>	Terminal to Heatsink Terminal to Terminal
	10mm 3mm
<b>Heatsink Surface Finish:</b>	R <sup>e</sup>
	< 6μm
<b>Heatsink Flatness:</b>	0.05mm
<b>Weight:</b>	35g

### Dimensions

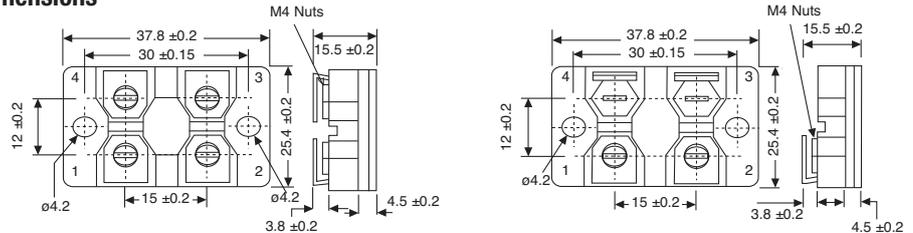

### Terminal Circuit Type

A (Standard)




B (Voltage Sense)




C (Special)




D (Isolated)




E (Network Tapped)




F (Network 3 Res.)



### Derating Curve

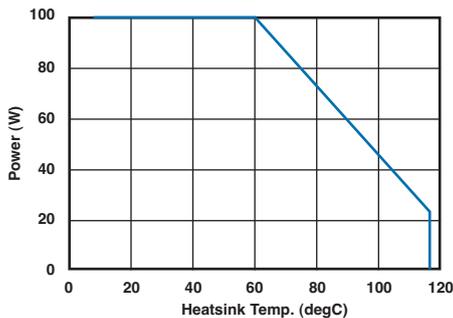

### Pulse Energy

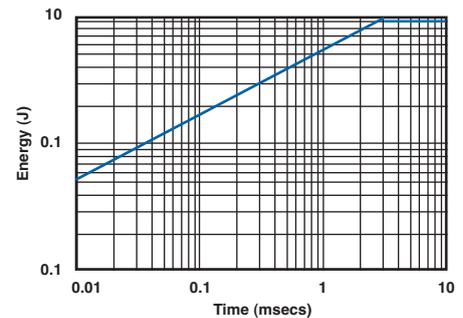

### How to Order

BDS 2	A	100	1K0	J
<b>Common Part</b>	<b>Circuit Type</b>	<b>Power Dissipation</b>	<b>Resistance Value</b>	<b>Tolerance</b>
BDS 2 (2 Terminal) BDS 4 (4 Terminal)	A: Standard B-F: See above	100 - 100 Watts at 70°C	0.6Ω (600mΩ) R60 1Ω (1000mΩ) 1R0 1KΩ (1000Ω) 1K0 1MΩ (1000000Ω) 1M0	F - 1% J - 5% K - 10%

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.  
Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Planar Resistors - Chassis Mount](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[LPS0300HR300JB](#) [20-100RP](#) [HVR10D2K0F](#) [HVR20C11MF](#) [HVR10D3M0J](#) [HVR30B82MF](#) [HVR10D25MK](#) [HVR30B500KF](#)

[BDS2A10033RK](#) [TAP800K68RE](#) [TGHHV15R0FE](#) [TL88J136C](#) [BA416775R0KE](#) [TL122KU221RE](#) [TGHDV100RJE](#) [TL71F9K40C](#)

[LPS0300HR560JB](#) [FPA100 47K J](#) [LPSA300H4R70JB](#) [LPSA300H10R0JB](#) [LPSA300H47R0JB](#) [LPSA300H1R00JB](#) [LPSA800H1R00JB](#)

[LPSA800H1000JB](#) [LPSA800H47R0JB](#) [LPSA300H1000JB](#) [LPSA800H10R0JB](#) [LPSA800H4R70JB](#) [504AS252KDG2](#) [TGHHV100RJE](#)

[TGHHV33R0JE](#) [TGHHV500RJE](#) [TGHHV5K00JE](#) [TGHHV5R00JE](#) [TGHHV680RJE](#) [TGHLV100RJE](#) [TGHLV150RJE](#) [TGHLV500RJE](#)

[TGHLV5K00JE](#) [HTS-14-12-40-3/4.8](#) [HTS-14-24-40-3/4.8](#) [HTS-15-230-100-1](#) [HTS-15-230-100-3/4.8](#) [HTS-15-230-100-3/6.3](#) [HTS-15-230-](#)

[150-3/6.3](#) [FPA100 100R J](#) [FPA100 22R J](#) [FPA100 2R0 J](#) [FPA100 330R J](#) [FPA100 6K8 J](#)