

Glass Passivated Three Phase Rectifier Bridge

VRRM = 1200 V - 1800V


IF(AV) = 200 A

FEATURES

- ◆ Three phase bridge rectifier
- ◆ Blocking voltage: 1200 to 1800V
- ◆ Heat transfer through aluminum oxide DBC
- ◆ ceramic isolated metal baseplate
- ◆ Glass passivated chip

Applications

- ◆ Three phase rectifiers for power supplies
- ◆ Rectifiers for DC motor field supplies
- ◆ Battery charger rectifiers
- ◆ Input rectifiers for variable frequency drives

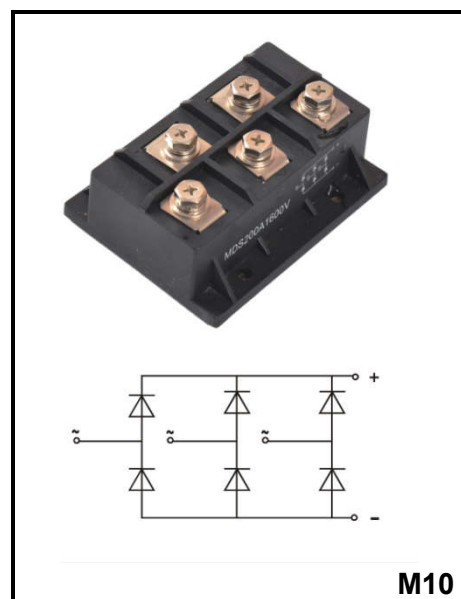

Maximum ratings, at Tj = 25 °C, unless otherwise specified

Parameter	Symbols	MDS200-12	MDS200-16	MDS200-18	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	1200	1600	1800	V
Maximum RMS voltage	V_{RSM}	1300	1700	1900	V

Symbol	Conditions	Values			Units
I_D	Three phase, full wave Tc=100°C	200			A
I_{FSM}	t=10mS Tvj =45°C	2240			A
I_{2t}	t=10mS Tvj =45°C	25000			A2s
Visol	a.c.50HZ;r.m.s.;1min	300			V
Tvj		-40 to +150			°C
Tstg		-40 to +125			°C
MT	To terminals(M6)	5±15%			Nm
Ms	To heatsink(M6)	5±15%			Nm
Weight	Module (Approximately)	220			g
Rth(j-c)	Module	0.10			°C/W
Rth(c-s)	Module	0.025			°C/W
Symbol	Conditions	Values			
		MIN.	TYP.	MAX.	
V_{FM}	T=25°C IF =200A	-	1.45	1.70	V
I_{RD}	Tvj=25°C $V_{RD}=V_{RRM}$ Tvj=150°C $V_{RD}=V_{RRM}$	-	-	16 8	uA mA

RATINGS AND CHARACTERISTIC CURVES

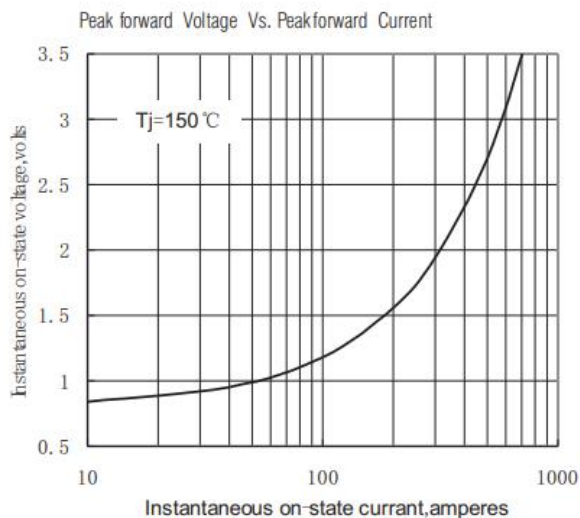


Fig. 1





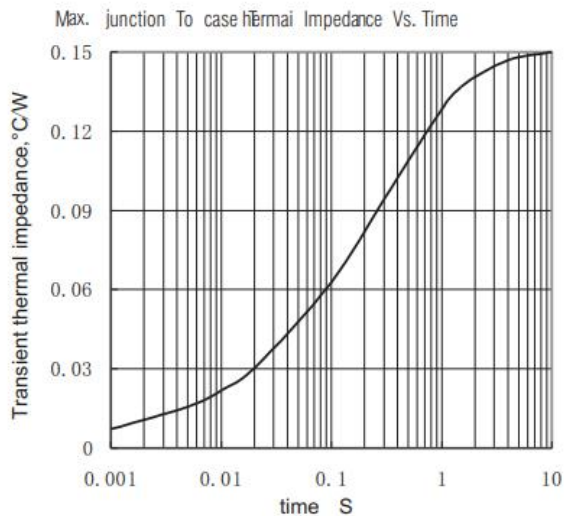


Fig. 2

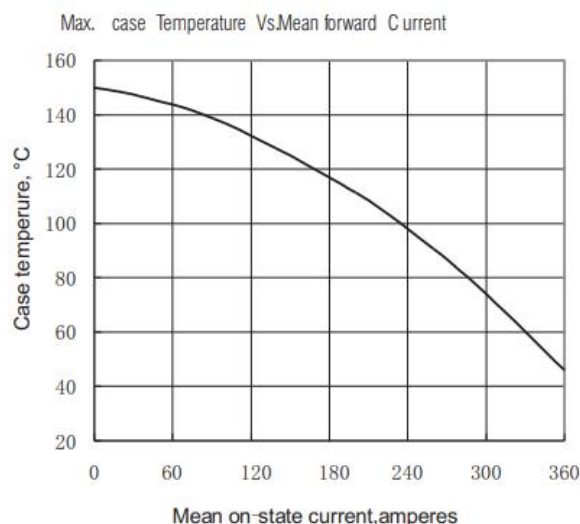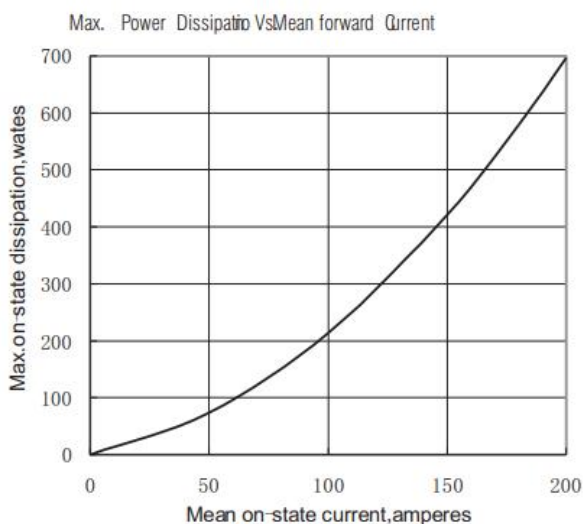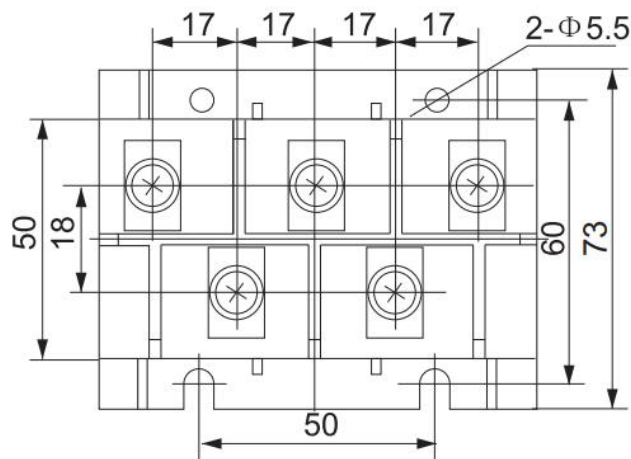

Outside Dimension

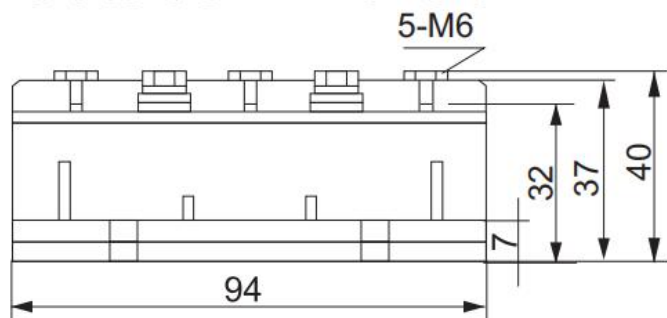

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [GBU15K-BP](#) [GBU4A-BP](#) [DB101-BP](#) [DBA100G](#) [DBA150G](#) [DBA250G](#) [DBA40G](#) [DBA500G](#)
[DBD10G-TM-E](#) [KBPC50-10S](#) [RS405GL-BP](#) [GBU6M](#) [TB102M](#) [MB1510](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [KBPC25-02](#)
[DB105-BP](#) [DBB08G-TM-E](#) [DF1510S](#) [MQSPA25](#) [TB354](#) [GBJ2504-BP](#) [B1S-G](#) [ABS10-G](#) [GBU6B-BP](#) [GBJ1508-BP](#) [BR5010-G](#) [ABS6-G](#)
[MSB15MH-13](#) [LBS10-13](#) [S3PDB60N18](#) [FPIL80](#) [CSB154](#) [BR86DL](#) [GBPC25-06W](#) [2W04M](#) [MB3510](#) [BR1508](#) [GBU6M-BP](#) [MCK200-18IO1](#) [GBJ25005-BP](#) [DMA90U1800LB-TRR](#)