

Specifications


备注 (Remark)

1. 材料 (MATERIAL)


胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA9T+30%G.F UL94V-0, Color: Black
 端子: 磷铜, 镍底30u", 表面镀普金
 Contact: Phosphorous, GOLD PLATING OVER ALL
 30u" NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电压: 250V AC/DC
 Rated Voltage: 250V AC/DC
 额定电流: 3 AMP
 Raring Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to+105° C
 Temperture Range: -40° C to+105° C



Recommended P. C. B LAYOUT
 General Tolerance ±0.05

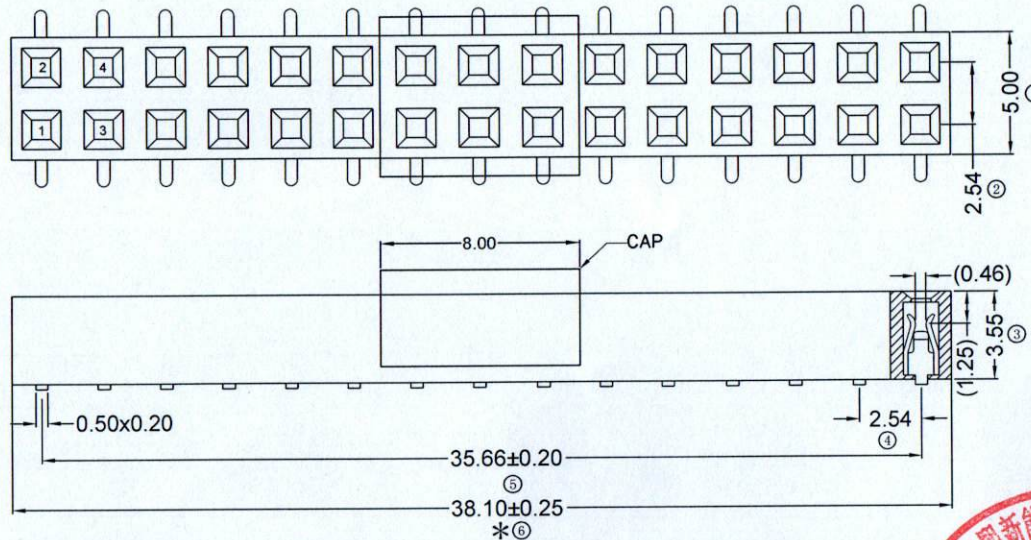

Ordering Information

F136-12 15 A0 C MU B 1

NO. OF PINS PER ROW 2-40P	Contact Plating	INSULATOR MATERIAL:	PACKING
A0=0.8u"	Full Of Gold	B0=0.8U"	A: PE Bag
A1=1u"	Semi-gold	B1=1U"	B: Tape & Reel
A2=1.5u"		B2=1.5U"	C: Tube
A3=2u"		B3=2U"	D: Tube+CAP
A4=3u"		B4=3U"	E: Tray
A5=5u"		B5=5U"	
A6=10u"		B6=10U"	
A7=15u"		B7=15U"	
A8=20u"		B8=20U"	
A9=30u"		B9=30U"	
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		



RoHS COMPLIANT

客编: V1169

注意事项

- 带序号为必检尺寸, 带*为重点检验尺寸
- 保持力0.5kg Min (公司标准)

			OPERATION	SCALE	Fit	Yxcon 广东宇熙新能源技术有限公司			
			X.X ±0.25	UNIT	MM	www.yxcon.com Guangdong Yuxi New Energy Technology Co., Ltd.			
			X.XX ±0.20	SIZE	A4	DESIGN	李官森2024.04.19	PART NO.	F136-1215A0CMUB1
			X.XXX ±0.10	SHEET	1/1	CHECK		TITLE:	FH2.54*3.6 2*15P SMT:7.2 总长38.1 (GRS)
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.	APPROVE	Customer No.	U型磷铜 PA9T料 镀普金 CAP+600PCS/卷 V1169
A0	2024.04.19	/	新版发行						

李官森 4.19

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Yxcon](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)