

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色:黑色.

Housing:PA9T+30%G.F UL94V-0, Color:Black

端子: 青铜, 镍底30u"MIN, 表面镀锡

Contact:Bronze, ORDINARY TIN PLATED OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current:2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围: -40° C to+105° C

Temperture Range: -40° C to+105° C

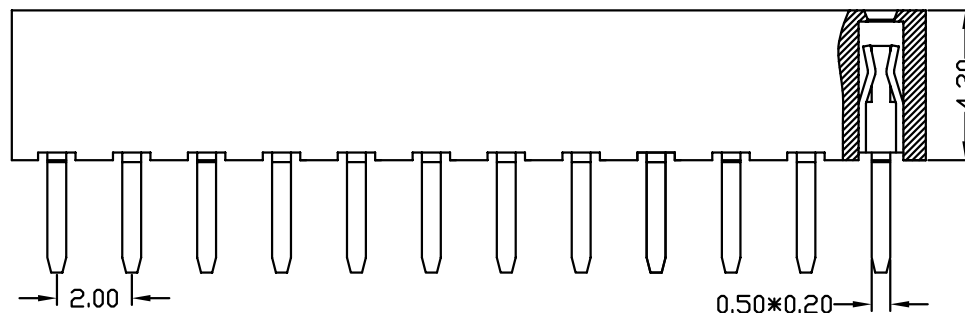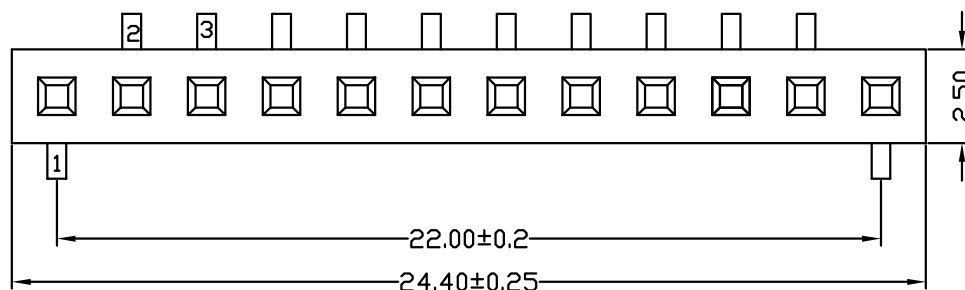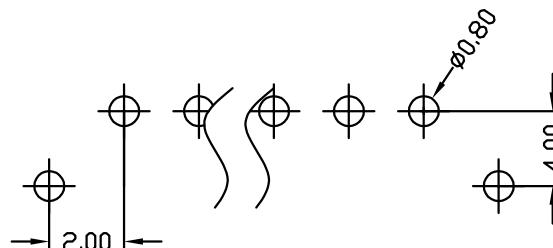

Ordering Information

F243-11 12 S1 C WU C 2

NO. OF PINS
PER ROW
1-50P

Full of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Plating
Semi-gold
B0=0.8u"
B1=1u"
B2=1.5u"
B3=2u"
B4=3u"
B5=5u"
B6=10u"
B7=15u"
B8=20u"
B9=30u"

INSULATOR
MATERIAL:
B: PA6T
C: PA9T
D: LCP

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

客编:

1. 第1. 12P反脚,
2. 带*为品管检验尺寸。

注意事项

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit	www.yxcon.com	东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	PART NO	F243-1112S1CWUC2
					X.X	+0.25	UNIT	MM					
A0	2020/01/15	新版发行	杨哲	方总	X.XX	+0.20	SIZE	A4	DESIGN	杨哲			
					X.XXX	+0.10	SHEET	1/1	CHECK			TITLE	PH2.0*4.3 1*12P 蜈蚣脚 脚距4.0 DIP:3.2
					Angle	+3°	PROJ.		APPROVE				镀亮锡 PA9T 第1. 12P反脚 管装
					DIM	TOL							

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Yxcon](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)